

# 351.186 AHD DVR-kit

Startup manual.

Connect the DVR to a monitor or other video source.

Connect the mouse to one of the USB ports

This can be done with the VGA plug or with a DVI connector.

Then connect the cameras with the 18mtr cable to the DVR.

Use 1 adapter with splitter cable for the 4 cameras.




Use the 2nd adapter for the DVR set.

Then insert the adapters into a wall contact box.


Now the screen will show the following.

Selecteer "Nächste", met de muis of met de remote.

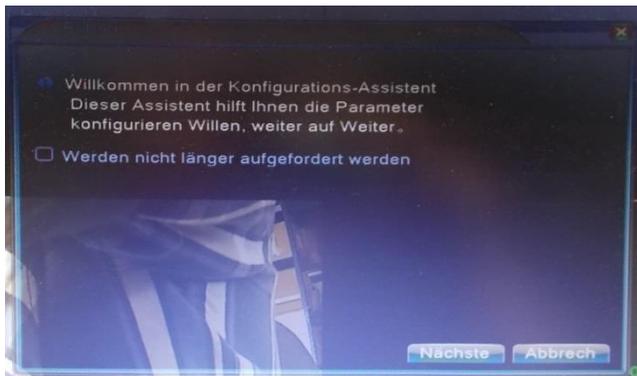

You will then see a login screen, select OK.

A password does not have to be filled in.

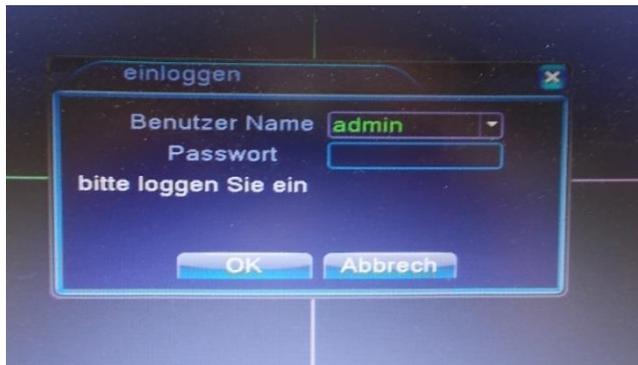

In the next "field" you can customize the time and language.




Select "Deutscher" and then choose your language, in this case Dutch.



Then select "Nächste".

Then select OK

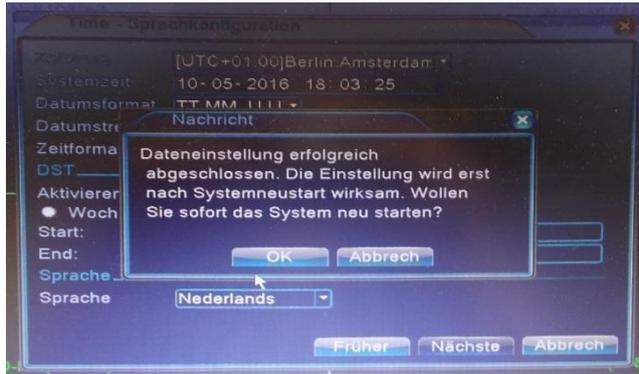

The device will restart.




Then press "Next" to continue. Set the time and date correctly, here you can also set the summer and winter time. To activate this select Select DST, then enter the correct date and time. Then press "Next" when you have a router connected to an UTP cable, and you can see one of these images.



U krijgt nu volgend scherm te zien.



Now press "Network" .

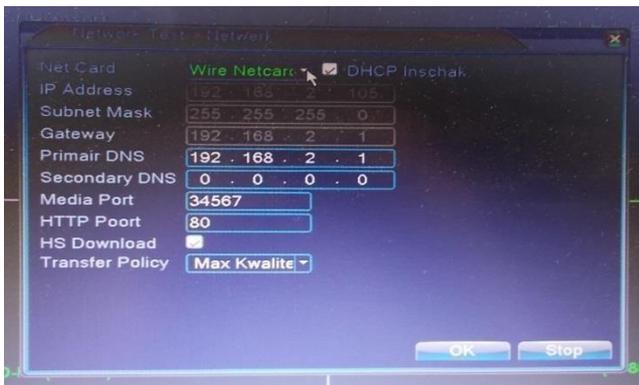

If the test went well in the previous step, you can read your IP address here.

If the Test was not good, check the DHCP to get an IP address from your router.

Sometimes the device must be restarted, press OK, then remove the adapter, wait a while, and reconnect again).

Then go back to here.

When you have the device properly connected to your router, and the router has a DHCP server (it has almost every router), you have now received an IP address that should work. Nu kunt u het vinkje weer weg halen bij de DHCP en hier net verkregen IP-adres invullen. (meestal blijft de date gewoon staan). Druk vervolgens op OK en voor de Test opnieuw uit door op "opnieuw proberen" te drukken. De test zou nu goed moeten gaan.

You will now see the next screen.



Using a QR scanner on your smartphone, you can scan any of the above QR codes, depending on your operating system. (Now you can install the Xmeye app)

With the screen you'll see, you can set up the app, later on more.



Set up on an Android device.


Start QR program and scan the Android app QR code and download and install the app.

Or go to the play store and install the "Xmeye" app (huangwanshui).


To install on an iOS device go to page 12.




Select link.




Press OK.

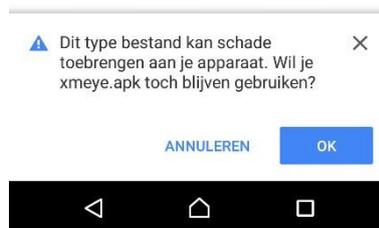

“Installeren”


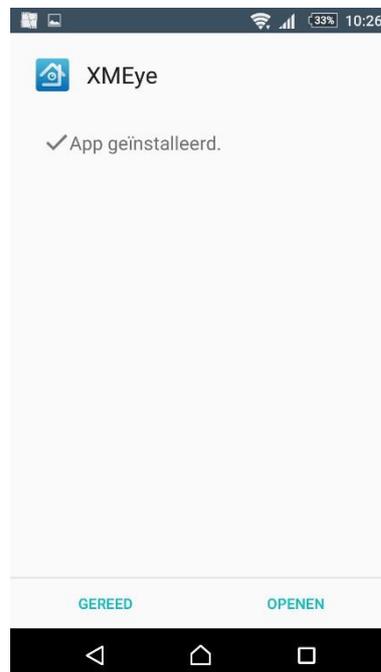


“Openen”

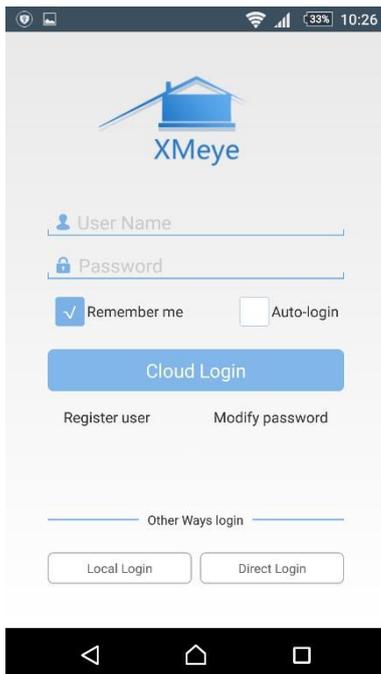

There are 2 ways to view the DVR set, on its own Wi-Fi network or with P2P.


When you want to look through the P2P function you need to register first.

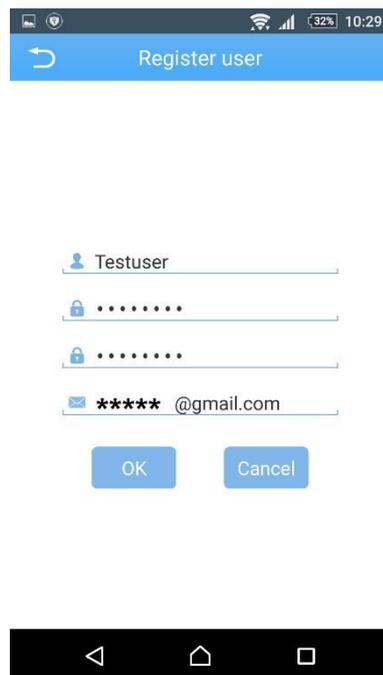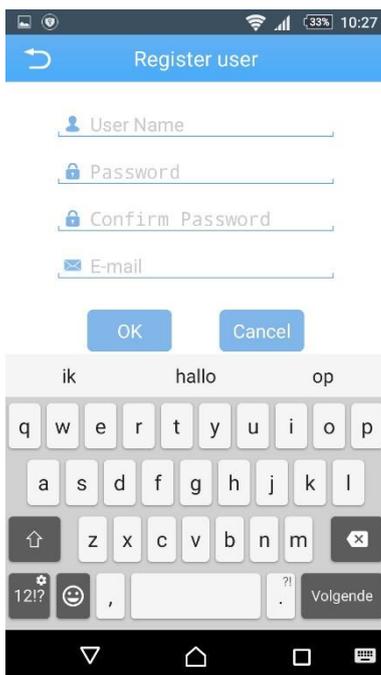

Then enter a username you have imagined

Also enter a password and enter the password again for verification

Also enter an email address and press OK.

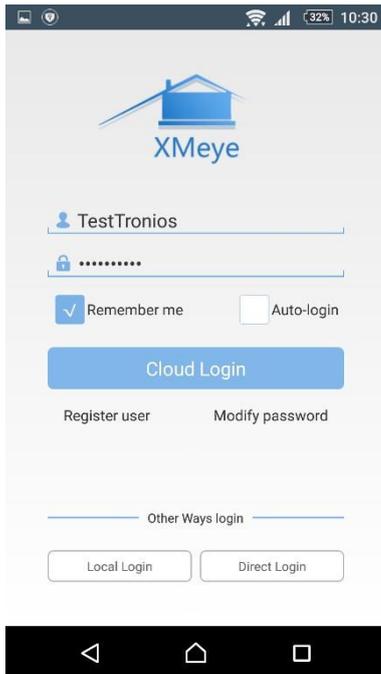

Enter your username and password here.

From here, setting is the same as with the local login.

Select Local Login to look through your own network.

(Note: phone must be connected to the same network.)

Or, if you want to watch P2P (3G / 4G or another network), select "Cloud login".




It may be that an update is available select here OK.

You may need to restart the app.


If the above does not appear or installed, please check the screen below.



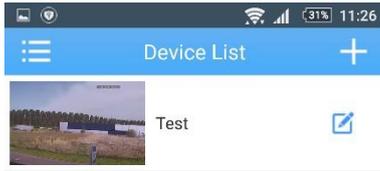

Select your DVR set here, with the "blue pen" you can change the data.

You will now see the four images from which you can choose.

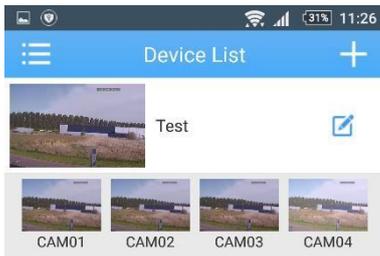

Select the image you want to see.



Here you will see the live image.

You can also "swip" 4 images at the same time by selecting the bottom banner to the left.



Select the yellow "button".




Set to an IOS device.

Start QR program and scan the iOS app QR code and download and install the app. Or go to the app store and install the "XMeye" app (Youlong Hu).



Install this app and select open.

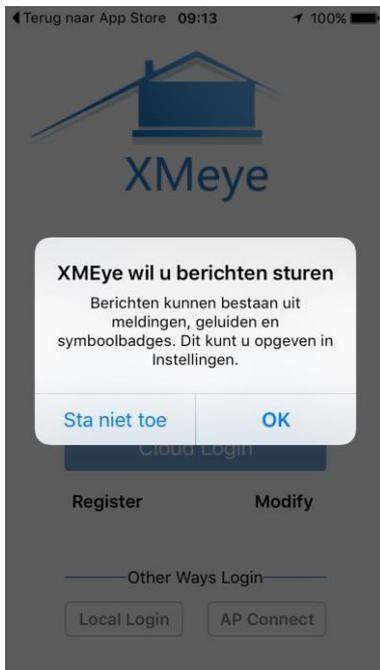

Select "OK"



Select "I know"

There are 2 ways to view the DVR set, on its own Wi-Fi network or with P2P.

When you want to look through the P2P function you need to register first.

Select "Register".

Now you will see this screen.




A screenshot of a mobile application's registration screen. At the top, there is a blue header with a back arrow and the word "Register". Below the header are four input fields: "User Name", "Password", "Confirm Password", and "Email". At the bottom, there are two buttons: "Register" and "Cancel".



A screenshot of the same registration screen, but now the input fields are filled. The "User Name" field contains "TestTronios2", the "Password" and "Confirm Password" fields contain masked text (dots), and the "Email" field contains "\*\*\*\*@gmail.com". A virtual keyboard is overlaid on the bottom half of the screen, showing the letters q through p on the top row, a through l on the second row, and z through m on the third row. The bottom row of the keyboard includes a numeric keypad icon, a smiley face, a microphone, a "spatie" key, and a "return" key.

Enter a name that you want to use, including a password and your email address.  
Then select "OK"

When everything went well, you will see the screen below and the registration has passed.

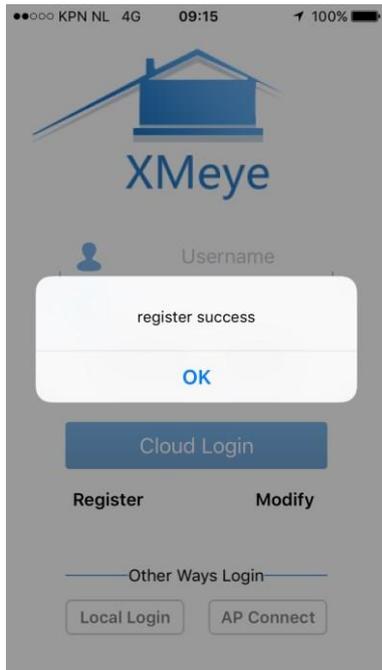

A screenshot of the XMeye application's home screen. At the top, there is a logo consisting of a house icon and the text "XMeye". Below the logo is a "Username" label and a white notification box with the text "register success" and a blue "OK" button. Underneath the notification box is a blue "Cloud Login" button. At the bottom, there are two buttons: "Register" and "Modify". Below these buttons is a section titled "Other Ways Login" with two buttons: "Local Login" and "AP Connect".


Select "OK"

From here, setting is the same as with the local login.

Select Local Login to look through your own network.

(Note: phone must be connected to the same network with wifi)


Or, if you want to watch P2P (3G / 4G or another network), select "Cloud login".

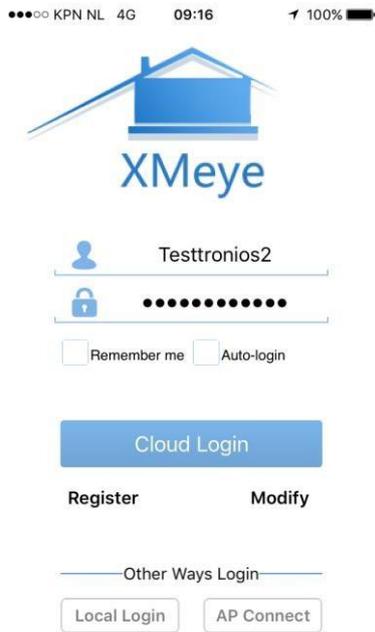

Enter the login details and press Cloud login.

Select "Remember me" then you do not always have to fill in the information.

After logging in, you will see (only the first time) the screen below.

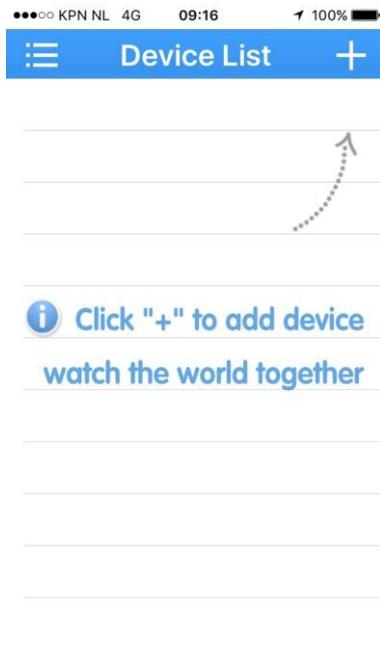

Select "+" to add the DVR.

●●○○ KPN NL 4G 09:16 100%

### AddDeviceAll

Manually add Quick configure

Device Name:

SerialNum:  

Username:

Password:

Port:



Enter the name you want to give your DVR set, now select the QR code in the second line and scan the QR code that is still in the picture of the DVR set (see page 5).

You will then see the ID number of your DVR set, then press OK.

If you change the password later, you should also fill in this here.

You will then see the screen below.

●●○○ KPN NL 4G 09:17 100%

### AddDeviceAll

Manually add Quick configure

Device Name:

SerialNum:  


Username:

Password:

Port:



Select "OK"

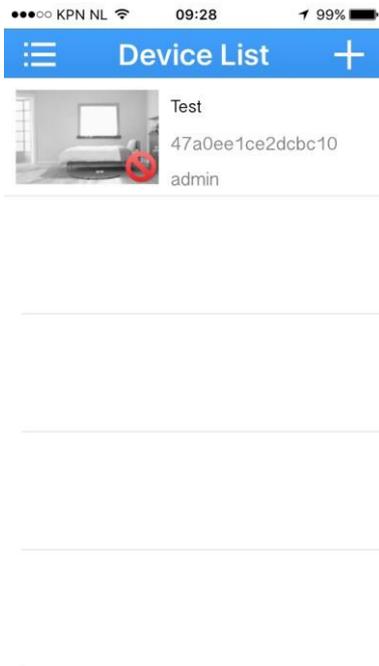

Select the device you want to watch. You will then see this image, select

By pressing the photo longer you can view the camera you want to view. Settings change.



If you want to view multiple images evenly, you can swipe down the lower settings to the right.  
Now select the "yellow button".

You will then see your 4 camera images.

